


General Tolerances/Allg.Toleranzen DIN ISO2768-mk

$0.5 \leq 3$ ± 0.1	$3 < 6$ ± 0.1	$6 < 30$ ± 0.2	$30 < 120$ ± 0.3	$120 < 400$ ± 0.5
---------------------------	----------------------	-----------------------	-------------------------	--------------------------

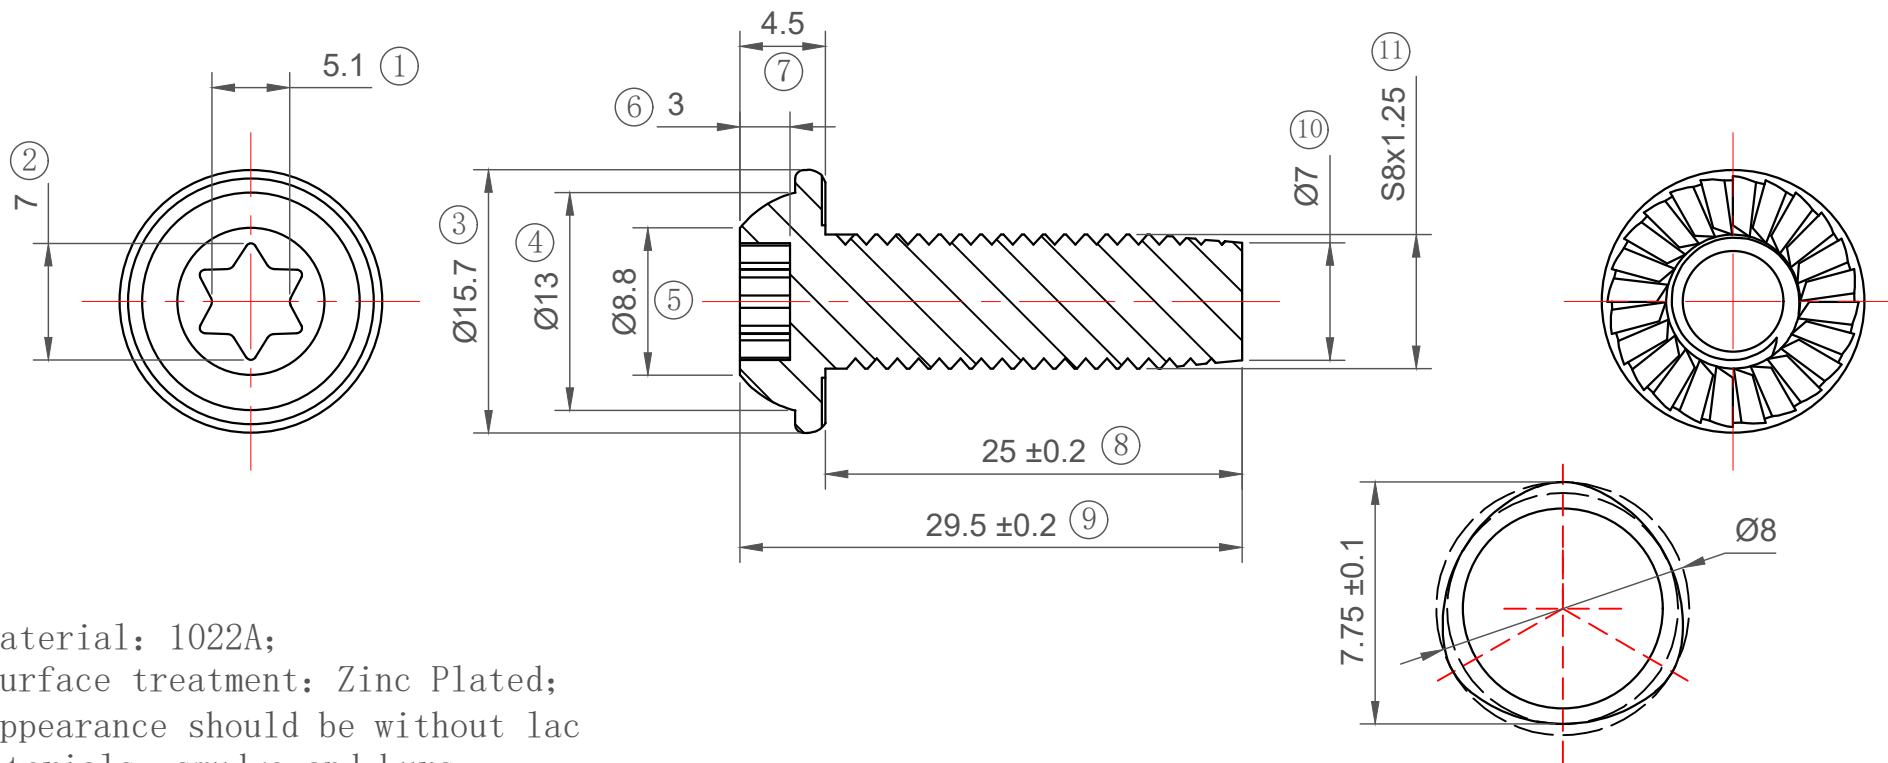

1. Material: 1022A;
2. Surface treatment: Zinc Plated;
3. Appearance should be without lac materials, smudge and burs;
4. Unspecified length tolerance according to 2768-M intermediate tolerance